


SECTION A-A

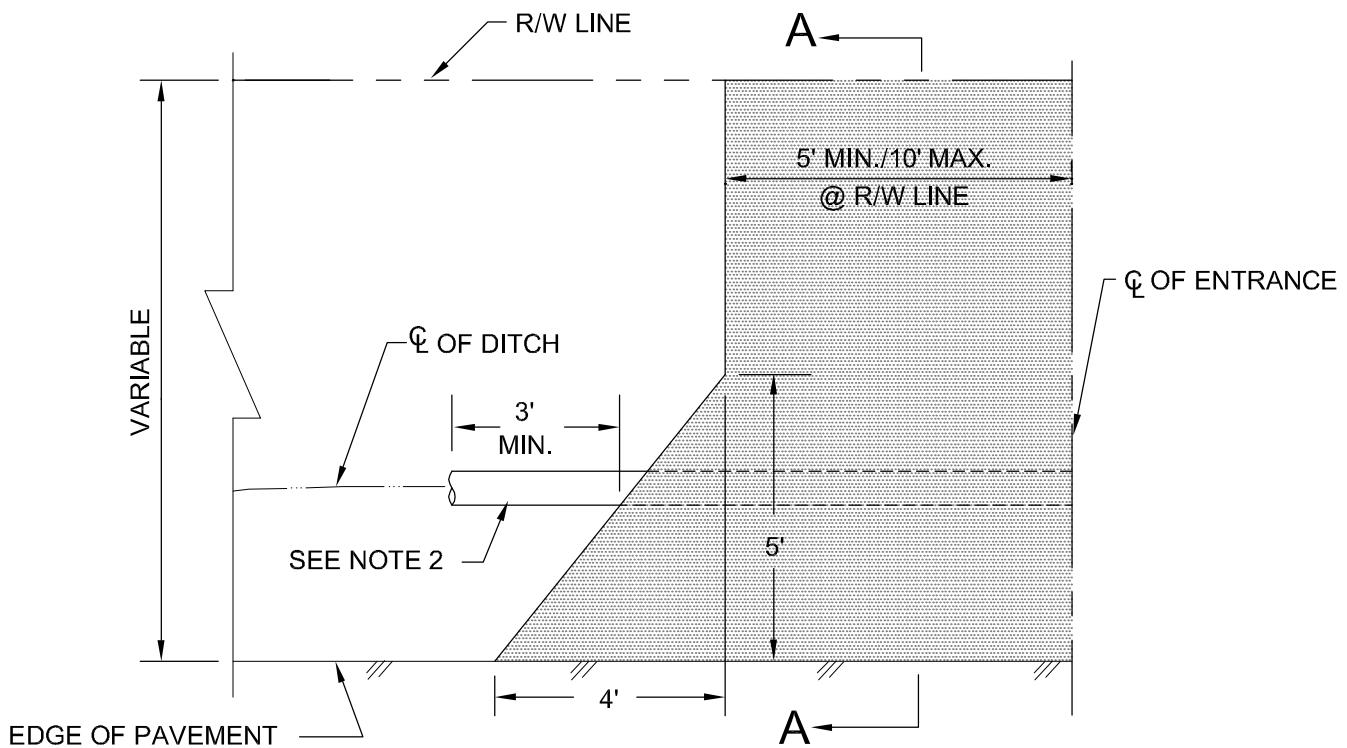

PLAN
(SYMMETRICAL ABOUT Q OF ENTRANCE)

NOTES:

1. PIPE LOCATION MAY VARY WITHIN THE RIGHT-OF-WAY AS NECESSARY. THE PIPE SHALL BE INSTALLED TO PROVIDE AND/OR MAINTAIN POSITIVE DRAINAGE.
2. PIPE SHALL EXTEND THREE FEET (MINIMUM) BEYOND FARDEST OUTSIDE EDGE OF ENTRANCE AT CROSSING. PROVIDE COVER OVER PIPE AS SPECIFIED BY MANUFACTURER.
3. WATER METERS AND SEWER CLEANOUTS SHALL NOT BE LOCATED IN DRIVEWAY (ENTRANCE) OR APRON UNLESS AUTHORIZED BY OWNER.

RESIDENTIAL ENTRANCE W/OUT CURB & GUTTER

NOT TO SCALE

REFERENCE	CATEGORY	DATE	SHEET No.	DETAIL No.
200,502	CONCRETE ITEMS	12/10	1 OF 1	CI_08