


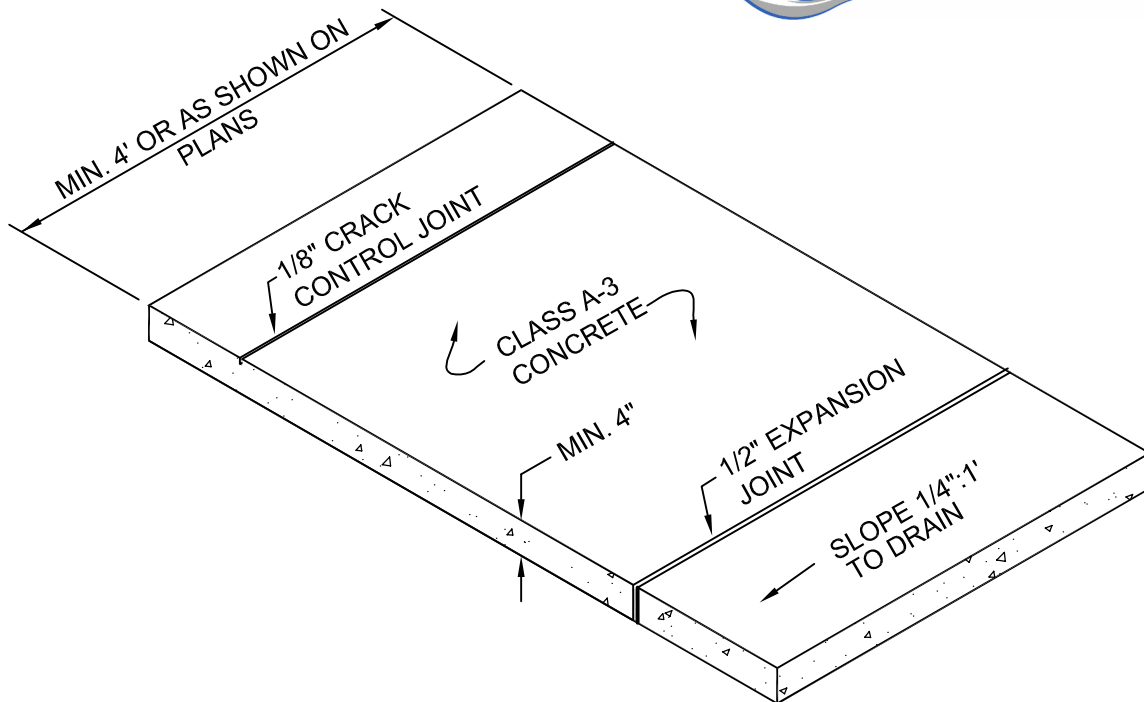

NOTES:

1. CRACK CONTROL JOINTS TO BE PROVIDED AT INTERVALS EQUAL TO THE WIDTH OF THE SIDEWALK BY SAWING, SCORING, "LEAVE-IN" INSERTS, OR CUTTER PLATES AND SHALL EXTEND INTO THE CONCRETE TO 1/4 OF THE DEPTH.
2. EXPANSION JOINTS TO BE INSTALLED AT INTERVALS NOT EXCEEDING 50', AND AT JUNCTION POINTS OF CURBS AND ENTRANCES, AND ON BOTH SIDES OF ALL SIDEWALK SECTIONS CONTAINING UTILITIES. PREMOLDED, 1/2" JOINT FILLER IS TO BE USED EXTENDING FROM BOTTOM OF SLAB TO 1/4" OF ITS TOP SURFACE.
3. AS SOON AS CONCRETE WILL NOT SLUMP, FACE FORMS ARE TO BE REMOVED, IRREGULARITIES REMOVED, A LIGHT BROOM FINISH GIVEN, AND A LIQUID MEMBRANE SEAL OR OTHER APPROVED CURING MEDIUM APPLIED.
4. SIDEWALKS ACROSS ENTRANCES SHALL HAVE A DEPTH OF SEVEN INCHES (7") WITH A MAXIMUM SLOPE OF 1":12".
5. THE CONTRACTOR SHALL PREVENT THE TEMPERATURE AT THE SURFACE OF THE CONCRETE FROM FALLING BELOW 40°F DURING THE FIRST 72 HOURS IMMEDIATELY FOLLOWING CONCRETE PLACEMENT. PROTECTIVE MATERIAL SHALL BE LEFT IN PLACE FOR AN ADDITIONAL 48 HOURS IF FREEZING AIR TEMPERATURES ARE EXPECTED TO CONTINUE.

SIDEWALK DETAIL

NOT TO SCALE

REFERENCE 200,502	CATEGORY CONCRETE ITEMS	DATE 6/16	SHEET No. 1 OF 1	DETAIL No. CI_09
----------------------	----------------------------	--------------	---------------------	---------------------