






REGIONAL CONSTRUCTION STANDARDS

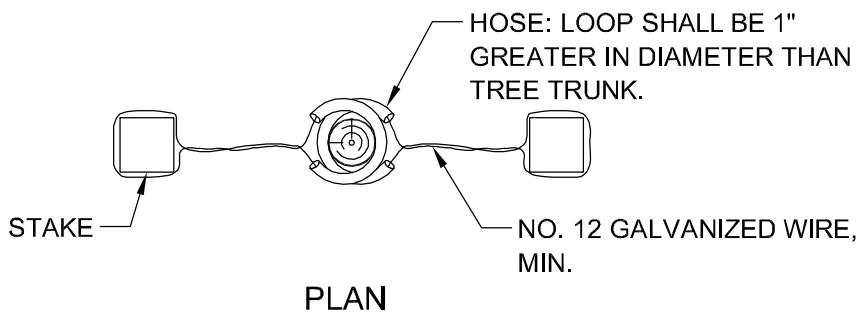

2 STAKES AND TIES. TIE TREE TRUNK 6" ABOVE BENDING MOMENT OF TREE. TIE SHOULD PROVIDE FLEXIBILITY OF TRUNK BUT NOT ALLOW RUBBING OF TRUNK AGAINST STAKE. CUT STAKES OFF 6" ABOVE TIES. FOR SINGLE STAKE TREES, PLACE STAKE ON WINDWARD SIDE OF TREE

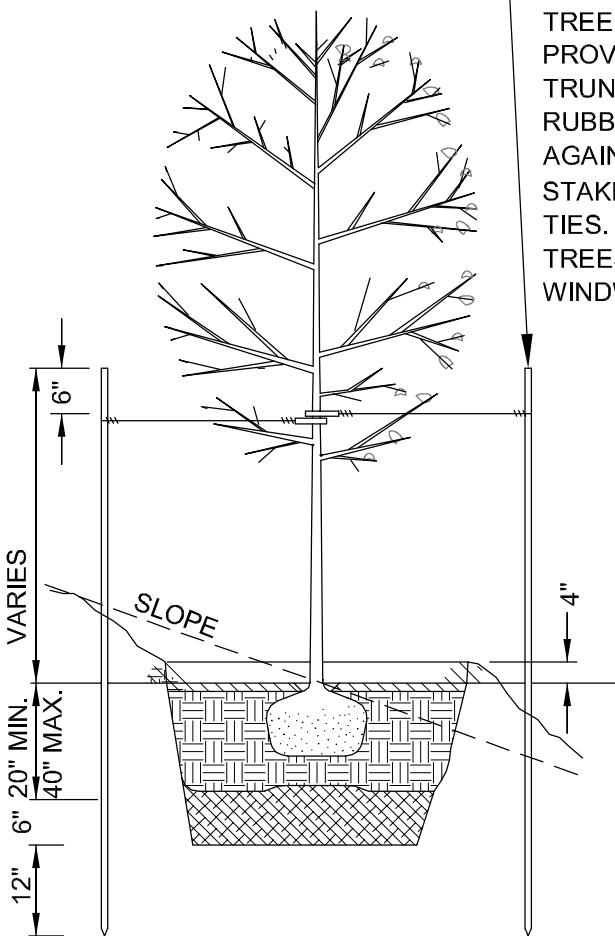

TREE STAKING - SLOPES

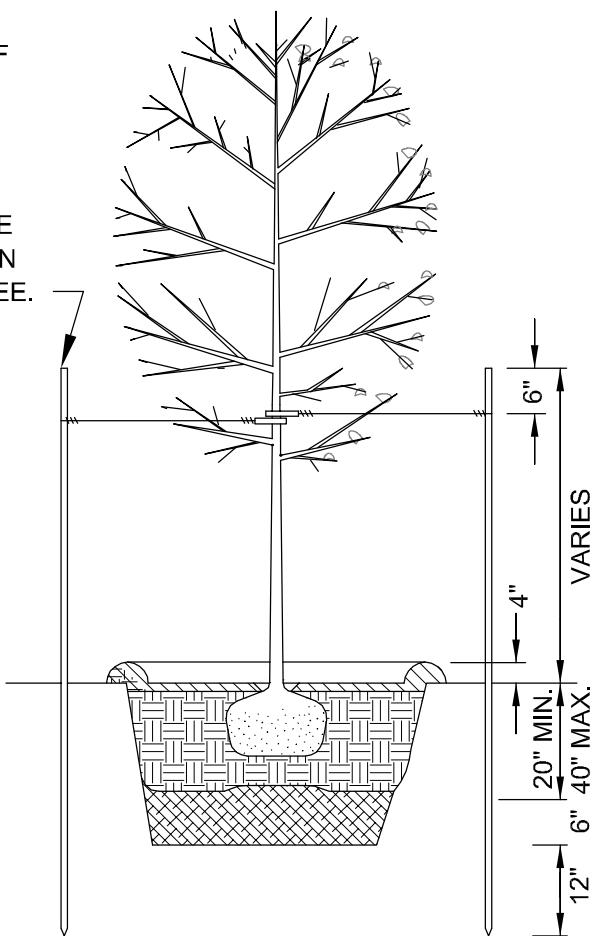

TREE STAKING - LEVEL GROUND

REFERENCE 200, 605	CATEGORY TREE STAKING	DATE 12/10	SHEET No. 1 OF 1	DETAIL No. LS-2
-----------------------	--------------------------	---------------	---------------------	--------------------