


PLAN VIEW

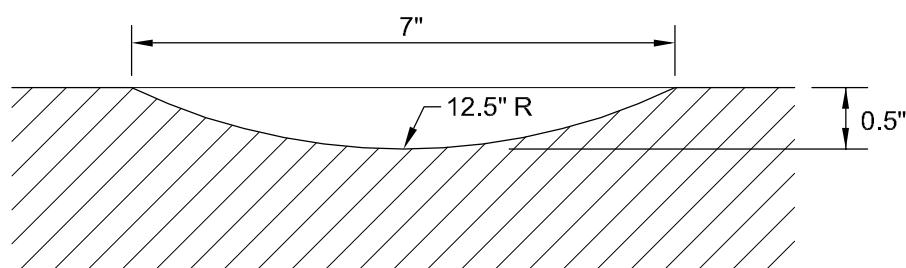

SECTION A-A

NOTES:

1. RUMBLE STRIPS SHALL BE INSTALLED CONTINUOUSLY AS DIRECTED BY THE OWNER.
  2. RUMBLE STRIPS SHALL NOT BE INSTALLED WITHIN LIMITS OF BRIDGE DRAINAGE APRONS OR SPECIAL DESIGN SHOULDER SLOT INLETS.
  3. RUMBLE STRIPS SHALL BE INSTALLED ON MAINLINE SHOULDERS ONLY.
- \* WHERE BICYCLES ARE NOT PROHIBITED, THE MINIMUM WIDTH OF THE OUTSIDE PAVED SHOULDER SHALL BE 8 FT.

## CONTINUOUS SHOULDER RUMBLE STRIPS

NOT TO SCALE

REFERENCE	CATEGORY	DATE	SHEET No.	DETAIL No.
200, 315A	ROADWAY CONSTRUCTION	12/10	1 OF 1	RC_03