



$\frac{1}{8}$ " X 1" NEOPRENE
GASKET

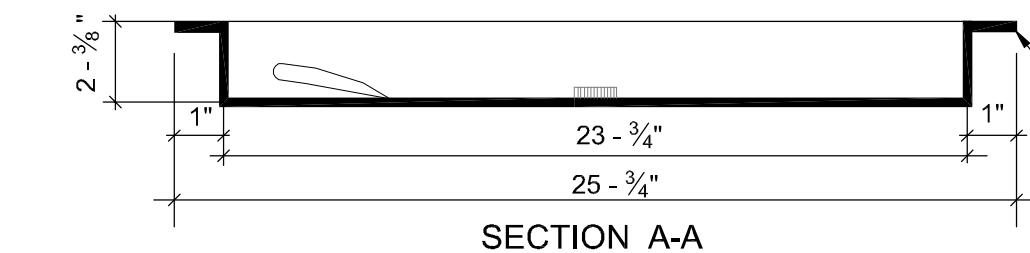

SECTION A-A

MINIMUM 18GA 304
STAINLESS STEEL

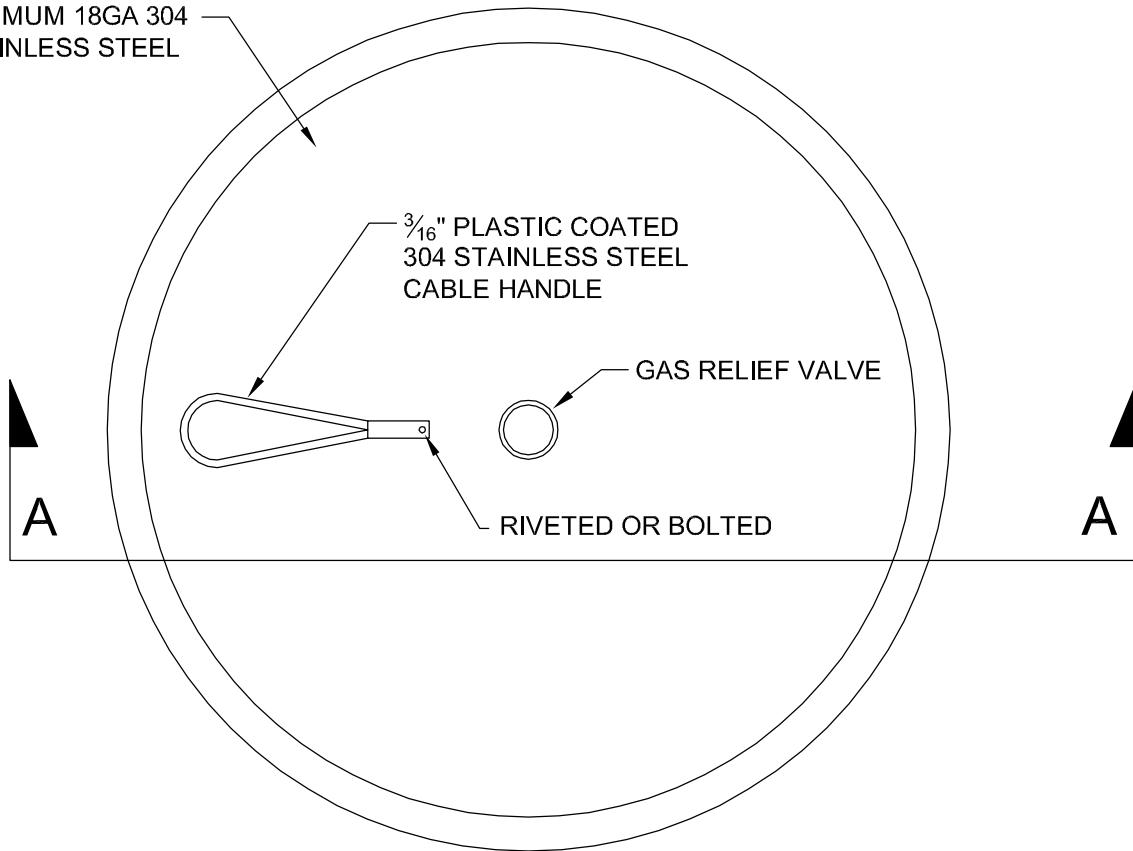

NOTES:

1. ACTUAL DIMENSIONS MUST BE COMPATIBLE WITH MANHOLE CASTING DIMENSIONS.
2. DUST COVER NOT REQUIRED WHEN USING MANHOLE INSERT.
3. GAS RELIEF VALVE SHALL BE CAPABLE OF RELEASING GAS AT A PRESSURE OF 0.5 TO 1.5 PSI AND HAVE A WATER LEAK DOWN RATE NO GREATER THAN 5 GALLONS / 24 HOURS.
4. LOAD TEST STRENGTH MUST EXCEED 3,000 POUNDS.
5. HANDLE MUST BE CAPABLE OF WITHSTANDING A MINIMUM 500 POUND PULL FORCE.

MANHOLE INSERT

NOT TO SCALE

REFERENCE 200	CATEGORY SANITARY SYSTEMS	DATE 12/10	SHEET No. 1 OF 1	DETAIL No. SS_19
------------------	------------------------------	---------------	---------------------	---------------------