




REGIONAL CONSTRUCTION STANDARDS

SIXTH EDITION

Publication Update 6.2

(Full Committee Approved Proposed Revision 6.2 –
Standard Detail CI_03
[Detail Revision Date 12/11/17]
As Publication Update 6.2)

March 27, 2018

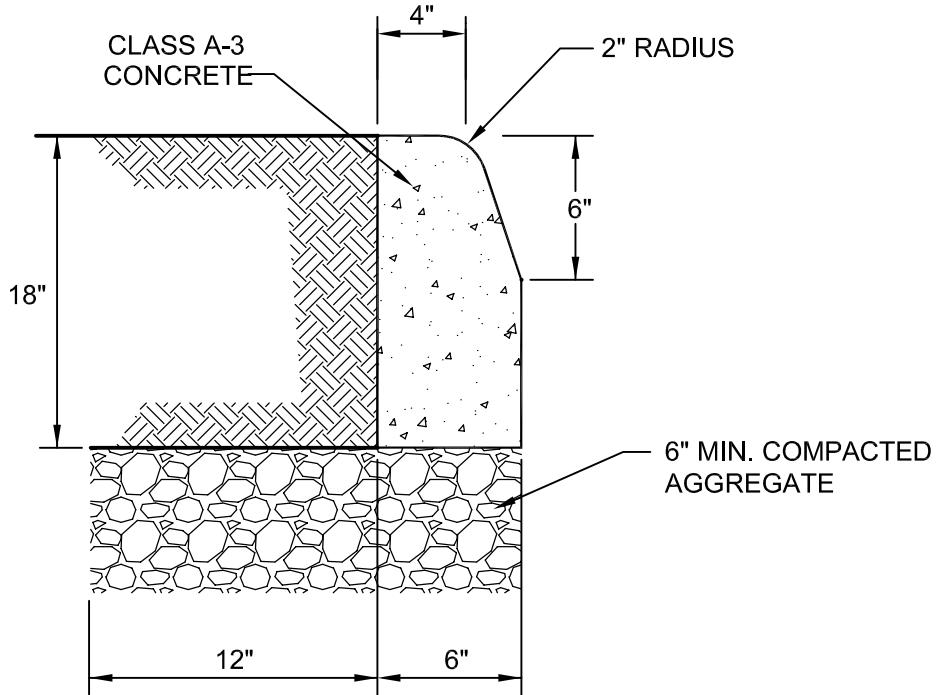

NOTES:

1. CRACK CONTROL JOINTS TO BE PROVIDED AT 10 FT. INTERVALS BY SAWING, SCORING, "LEAVE-IN" INSERTS, OR CUTTER PLATES TO 1-1/2 INCH DEPTH.
2. EXPANSION JOINTS TO BE INSTALLED PER SPECIFICATIONS SECTION 502.
3. AS SOON AS CONCRETE WILL NOT SLUMP, FACE FORMS ARE TO BE REMOVED, IRREGULARITIES REMOVED, A LIGHT BROOM FINISH GIVEN, AND LIQUID MEMBRANE SEAL OR OTHER APPROVED CURING MEDIUM APPLIED.
4. THE CONTRACTOR SHALL PREVENT THE TEMPERATURE AT THE SURFACE OF THE CONCRETE FROM FALLING BELOW 40°F DURING THE FIRST 72 HOURS IMMEDIATELY FOLLOWING CONCRETE PLACEMENT. PROTECTIVE MATERIAL SHALL BE LEFT IN PLACE FOR AN ADDITIONAL 48 HOURS IF FREEZING AIR TEMPERATURES ARE EXPECTED TO CONTINUE.
5. THE DEPTH OF THE CURB MAY BE REDUCED AS MUCH AS 3" (15" DEPTH) OR INCREASED AS MUCH AS 3" (21" DEPTH) IN ORDER THAT THE BOTTOM OF CURB WILL COINCIDE WITH THE TOP OF A COURSE OF THE PAVEMENT SUBSTRUCTURE. OTHERWISE, THE DEPTH IS TO BE 18" AS SHOWN. NO ADJUSTMENT IN THE PRICE BID IS TO BE MADE FOR A DECREASE OR AN INCREASE IN DEPTH.

STANDARD MEDIAN CURB

NOT TO SCALE

△ REVISED 12/11/17

REFERENCE	CATEGORY	DATE	SHEET No.	DETAIL No.
200,502	CONCRETE ITEMS	12/10	1 OF 1	CI_03