



SECTION A-A

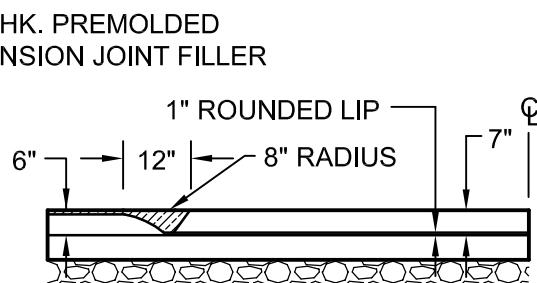


SECTION AT GUTTER LINE

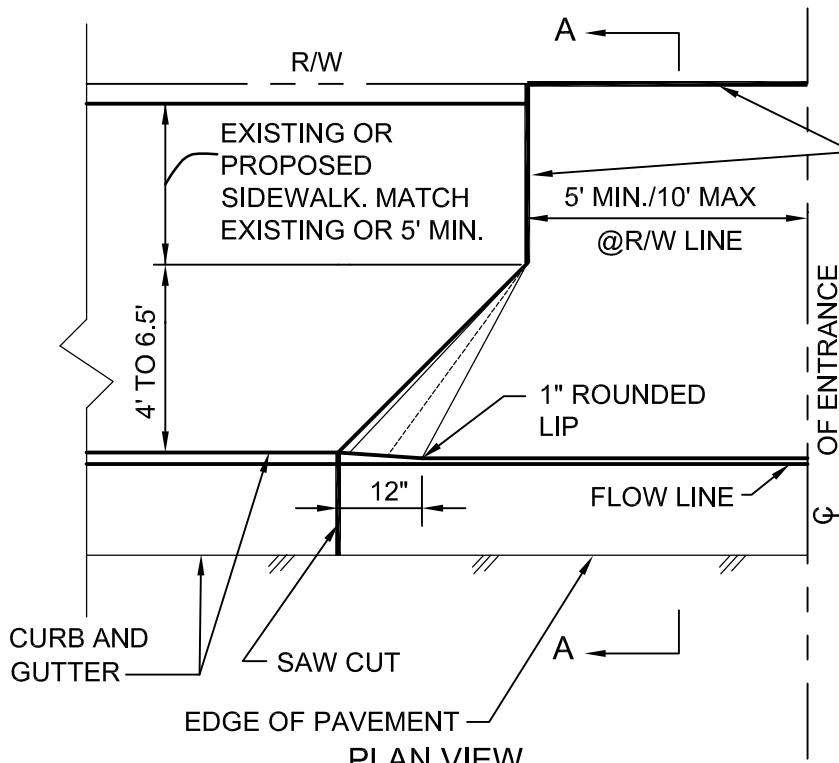

NOTES: (SYMMETRICAL ABOUT $\frac{C}{2}$ OF ENTRANCE)

1. IF AN EXISTING SIDEWALK IS AFFECTED BY THIS INSTALLATION, IT MUST BE REMOVED TO THE NEAREST JOINT AND REPLACED WITH CLASS A-3 CONCRETE, SEVEN INCHES THICK.
2. A SLOPE OF 1/4":12" (UPWARD) IS REQUIRED FROM TOP OF CURB TO RIGHT-OF-WAY LINE, (ON ENTRANCE OR ON SIDEWALK).
3. ENTRANCES WITHIN TWO FEET OF EACH OTHER, MEASURED AT THE CURB LINE, MAY CONNECT TO SHARE A WIDER APRON DESIGN.
4. WATER METERS AND SEWER CLEANOUTS SHALL NOT BE LOCATED IN DRIVEWAY (ENTRANCE) OR APRON UNLESS AUTHORIZED BY OWNER.

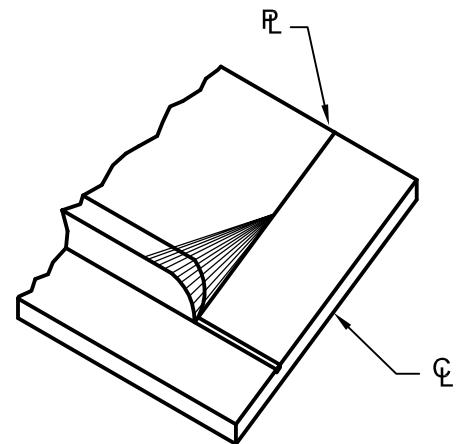

ISOMETRIC VIEW

RESIDENTIAL CONCRETE ENTRANCE W/ CURB & GUTTER

NOT TO SCALE

REFERENCE	CATEGORY	DATE	DETAIL No.
200,502	CONCRETE ITEMS	6/16	1 OF 1