


FOR DISCHARGE INTO SHALLOW MANHOLE

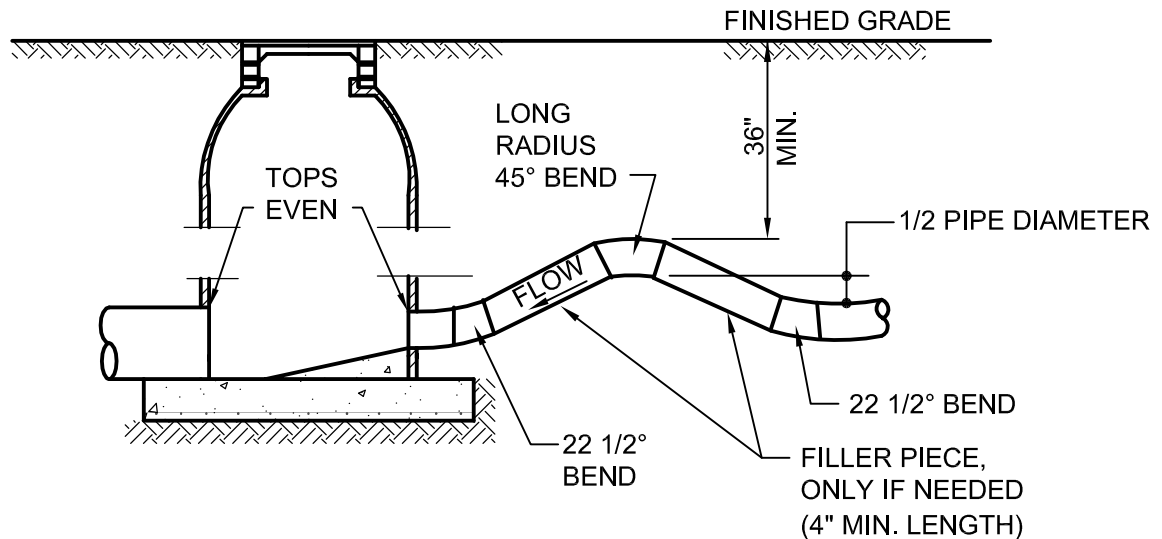

FOR DISCHARGE INTO STANDARD MANHOLE

NOTES:

1. ALL JOINTS MUST BE PROTECTED BY RETAINER GLANDS OR THREADED RODS (GALV.).
2. ALL RESTRAINTS SHALL BE IN ACCORDANCE TO LOCALITY REQUIREMENTS.
3. COAT MANHOLE PER LOCALITY REQUIREMENTS.

FORCE MAIN SAXOPHONE

NOT TO SCALE